

Web API example


# Cuelist Cue Viewer

Show a cuelist's cues. This might be useful for a theater where you have someone to read the cues for you.


<b>author, date</b>	Sebastian Beutel, September 2021
<b>published</b>	<a href="https://www.avolites.de/downloads/icke_siegen/ViewCues/">https://www.avolites.de/downloads/icke_siegen/ViewCues/</a>
<b>prog. lang./ framework</b>	HTML, JS, CSS; none (wrote everything with a text editor)
<b>description</b>	Shows a cuelist's cues with their legends and notes. Idea from <a href="https://www.facebook.com/groups/Avolites/posts/2317601988372022/">https://www.facebook.com/groups/Avolites/posts/2317601988372022/</a>
<b>other requirements</b>	e.g. a web browser is required

## Video

(not yet uploaded)

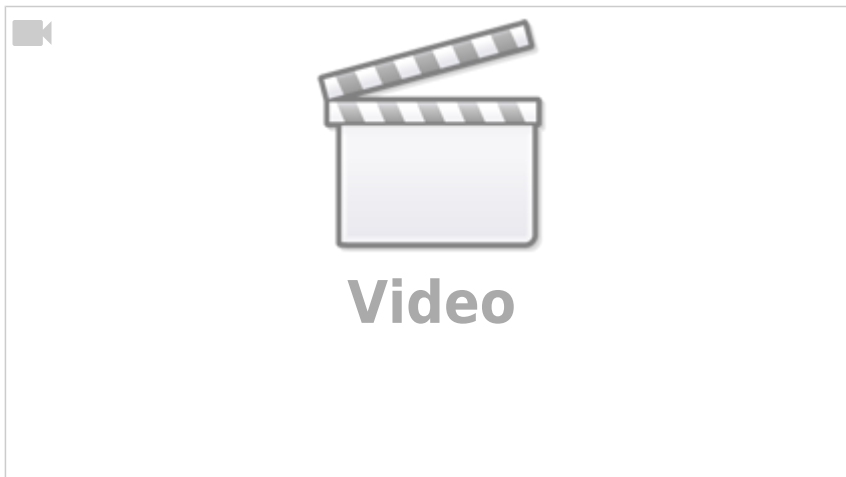

## Screenshots

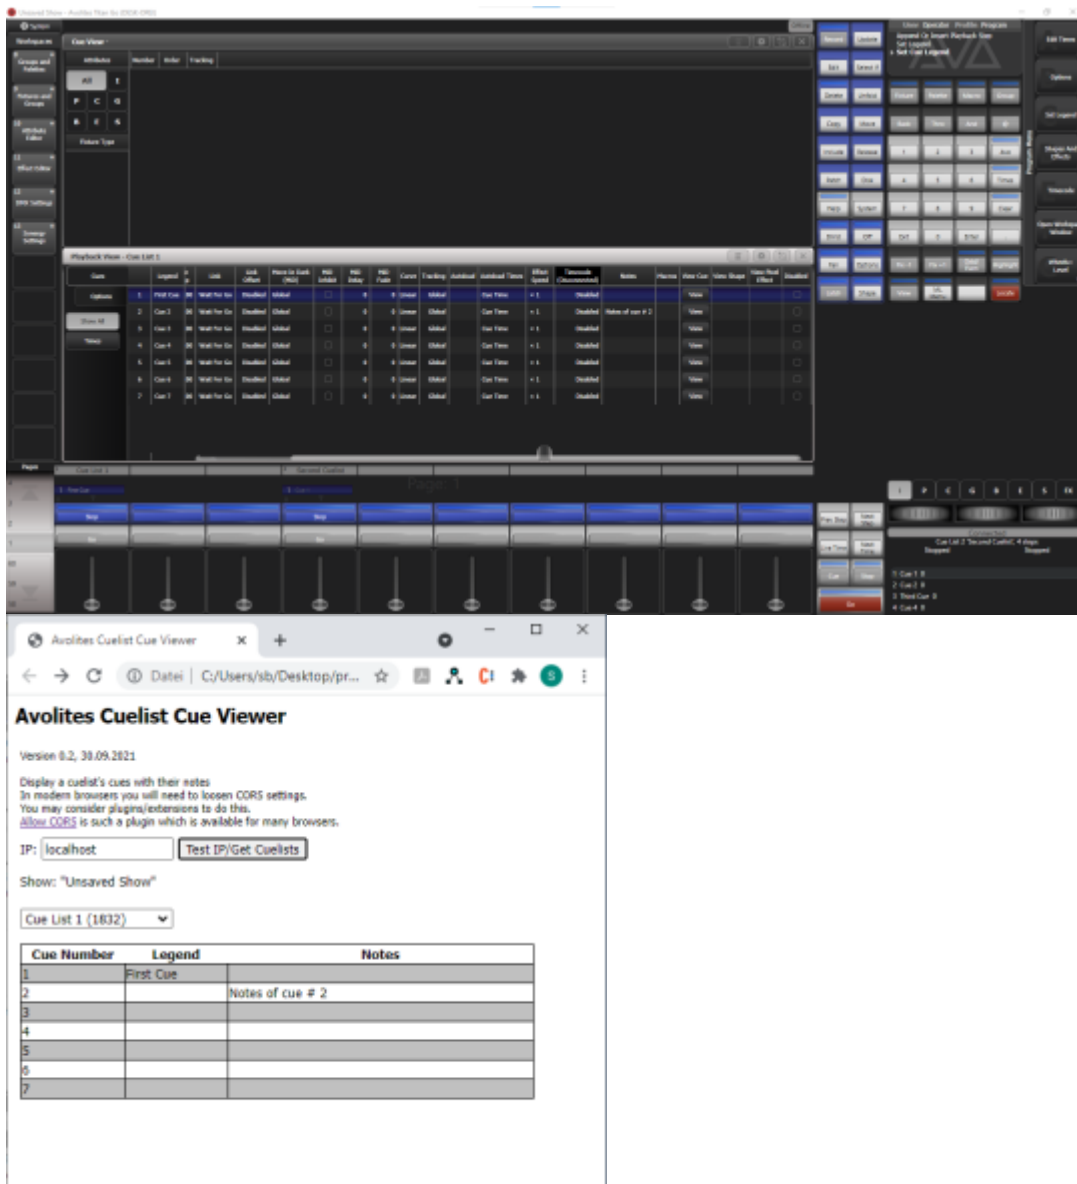

## How it works

Initialize reads all the current playbacks and puts them into an array.

Show Playbacksarray shows the current contents of this array.

Start Legend Rewrite starts the real process: every second the playbacks are requested and compared to the playback array. If a playback is not in the array - which means it is new - its legend is set to the current time.

## API Requests

- [System/SoftwareVersion](#)

- [Handles](#)
- [Handles\\_SetSourceHandleFromHandle](#)
- [ActionScript\\_SetProperty\\_String](#)
- [Handles\\_SetLegend](#)

From:

<https://avosupport.de/wiki/> - **AVOSUPPORT**

Permanent link:

<https://avosupport.de/wiki/webapi/examples/cuelistcueviewer?rev=1633010541>

Last update: **2021/09/30 14:02**

