

Web API example


# Set Timecode Start from Palette fade

Set the Timecode start time for versions pre Titan v14. The challenge is that this requires a TimecodeTime object but the required cast was only implemented in Titan v14. The workaround is to set the palette fade time (as you would do by simply entering a number) and then call a macro which uses this to set the timecode start time.


|                               |  |
|-------------------------------|--|
| <b>author, date</b>           | Gregory Haynes, February 2022  |
| <b>published</b>              | here   |
| <b>prog. lang./ framework</b> | none - simple http requests  |
| <b>description</b>            | set the palette fade time, then call a macro to transfer this into timecode start time |
| <b>other requirements</b>     | a way to issue POST requests, e.g. RestMan for Chrome                                  |

## Screenshots

1. use RestMan (or another way to output a Post request) to set the palette fadetime

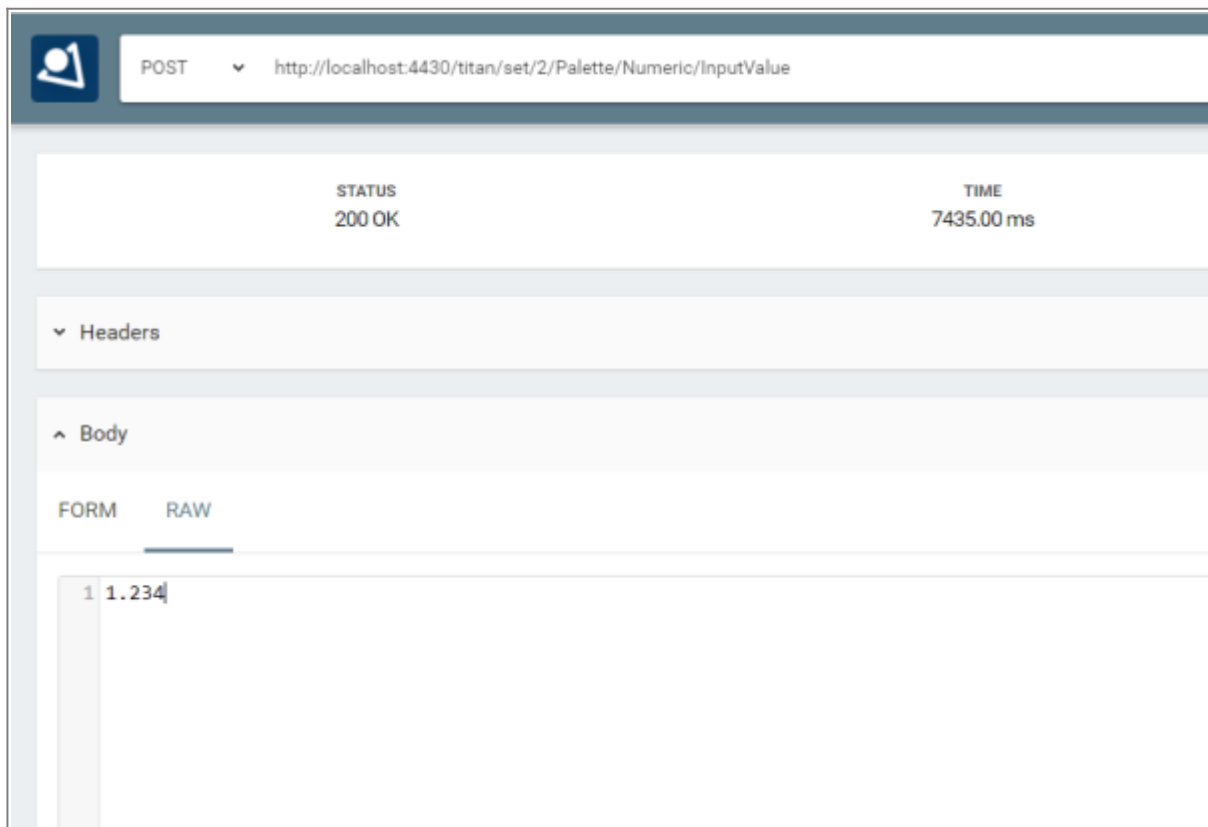

2. call a macro (here: [Timecode - Set Start Time from Palette Fade](#) to use the value as Timecode start time)

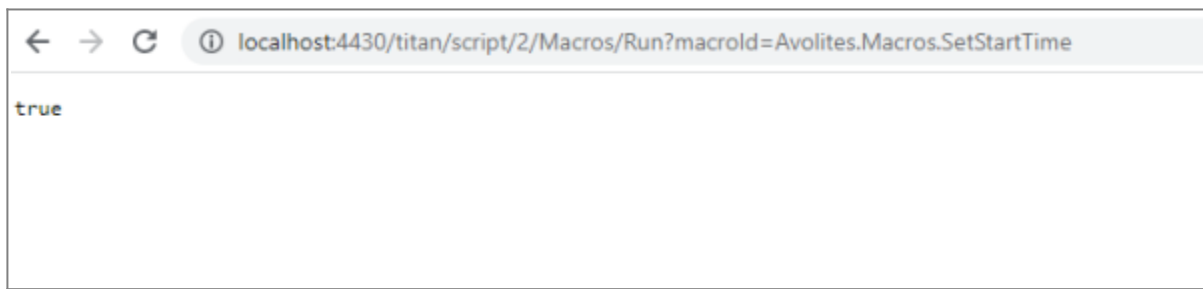

In order to call a macro via WebAPI it needs to be in the show library AND needs to be copied/moved to a handle.

## API Requests

- [InputValue](#)
- [Run](#)

From:  
<https://avosupport.de/wiki/> - AVOSUPPORT

Permanent link:  
<https://avosupport.de/wiki/webapi/examples/settimecodefrompalettefade?rev=1643968939>

Last update: **2022/02/04 10:02**

