

Web API example


Set Timecode Start from Palette fade

Set the Timecode start time for versions pre Titan v14. The challenge is that this requires a TimecodeTime object but the required cast was only implemented in Titan v14. The workaround is to set the palette fade time (as you would do by simply entering a number) and then call a macro which uses this to set the timecode start time.


author, date	Gregory Haynes, February 2022
published	here
prog. lang./ framework	none - simple http requests
description	set the palette fade time, then call a macro to transfer this into timecode start time
other requirements	a way to issue POST requests, e.g. RestMan for Chrome

Screenshots

1. use RestMan (or another way to output a Post request) to set the palette fadetime

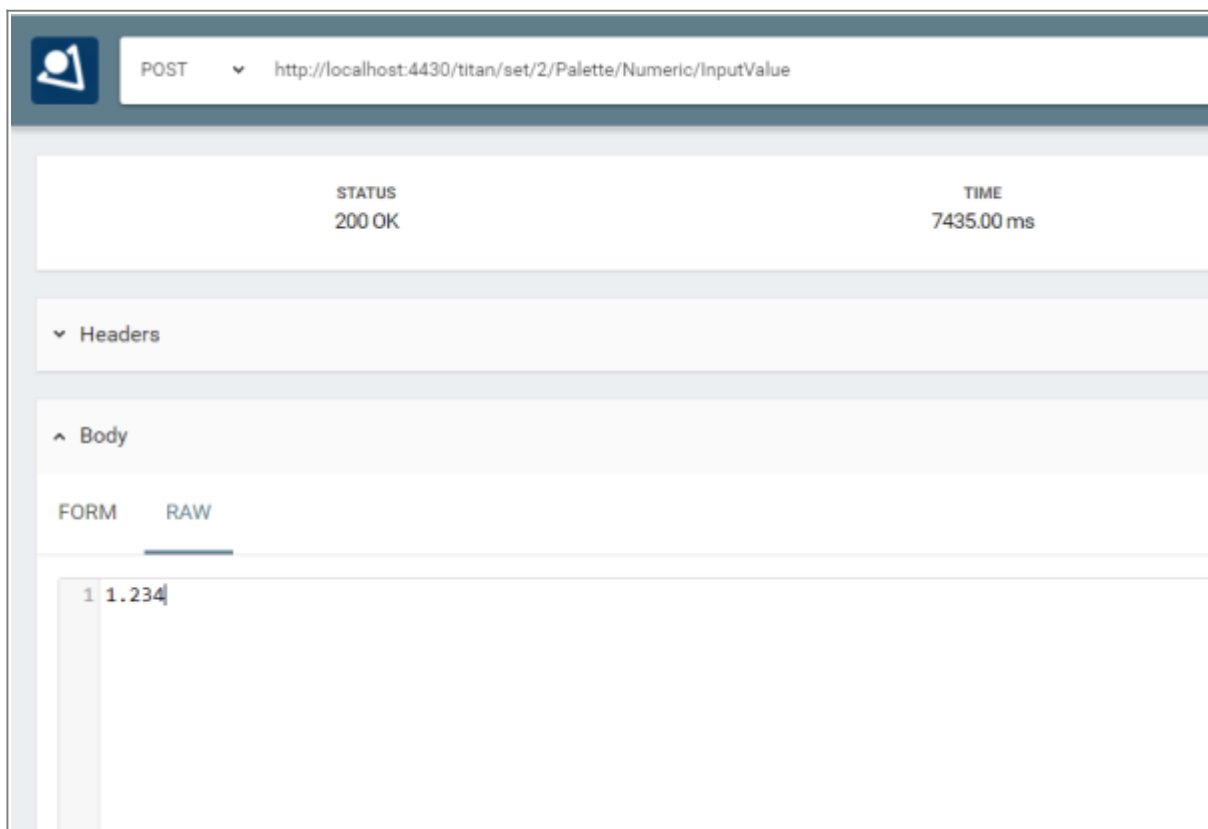

2. call a macro (here: [Timecode - Set Start Time from Palette Fade](#) to use the value as Timecode start time)

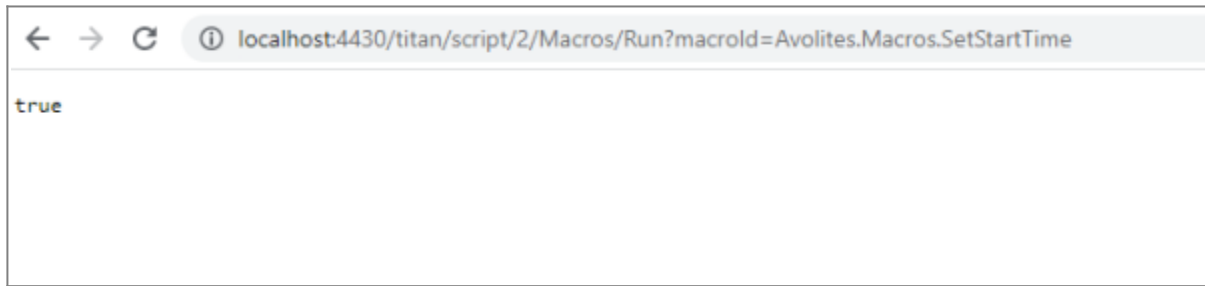

In order to call a macro via WebAPI it needs to be in the show library AND needs to be copied/moved to a handle.

API Requests

- [InputValue](#)
- [Run](#)

From:
<https://avosupport.de/wiki/> - AVOSUPPORT

Permanent link:
<https://avosupport.de/wiki/webapi/examples/settimecodefrompalettefade?rev=1643968939>

Last update: **2022/02/04 10:02**

